


4CH-RF Smart Switch

Model: 7-32V 4CH RF Switch
 Model: 7-32V 4CH RF Module
 Model: 7-32V 4CH Module



Parameters:


Input voltage: DC5V/ 7V~32V
 Max.Current: 2200W/10A/ Gang
 Max.load: 3500W/16A / 4Gang
 Wi-Fi Standard: Wi-Fi 2.4ghz b/g/n
 Working temperature:-20°C~70°C
 Working humidity:≤80%
 Material:ABS
 Size:134*79*28mm

Checklist before using the device


- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You have the correct WiFi PWD.
- Your smart phone or tablet must have access to APP store,Google play.
- Your router is MAC-open.

User Guide

- 1 Start with "EWelink" APP.



- 2 Register an EWlink account.
- 3 If you have EWelink account, just login.
- 4 Power up.

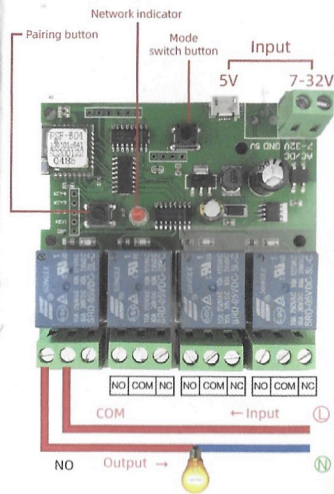


Add devices

- 1 Reset the device first:
 if the network indicator blinking fast (blinking twice and on) , skip the reset step.
 ① Power on
 ② hold down the pairing button for 5 seconds. until network indicator(red light) blinking fast(blinking twice and on).

- 2 Tap + on EWelink app.



- 3 Select Quick Pairing Mode .
 special cases You can try compatibility Model (AP)




- 5 Name your device.



- 6 When the WiFi LED is on,the device is online.


APP Function

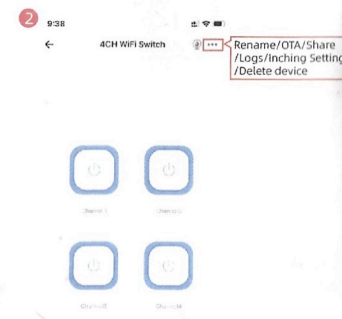

For single/repeat timers.
 For fast single countdown timer.

TROUBLESHOOTING Solutions for the failure of product matching and offline:

Enter the homepage of App,click the icon in the lower right corner of the interface to enter. "Message" >hits" Guide". "Message" >hits" EWelink support"

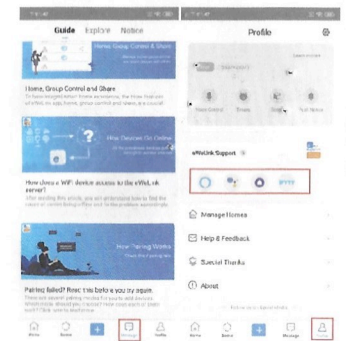

If none of the above is resolved,please open it with another phone.Personal hotspot,try to readd.